

URBANWORX

CORDLESS HANDHELD **AIR COMPRESSOR**

UX150AT3



INSTRUCTION MANUAL

Please read this manual carefully before using, and keep it for future reference.

CONTENTS

General Safety	4
Before first use	6
Product Overview	7
Basic Operation	8
Charging Battery (with mains)	8
Direct Compressor Use with 12V DC Car Adaptor/Charger	9
Using the Lamp (LED)	10
Connecting the Inflator	10
Inflating the Tyres	11
Information	14
Specification	15
Customer Support	Last Page

GENERAL SAFETY

Read this manual thoroughly before you start using the product.

Store this manual, the completed warranty card, your receipt and the product packaging.

The safety precautions instructions reduces the risk of fire, electric shock and injury when correctly complied to.

Please follow all instructions and take notice of all warnings.

IMPORTANT INFORMATION

- Do not expose this product to rain or moisture as it may result in fire.
- Do not temper or change or modify the product in any way.
- Only use Accessories outlined and recommended by the manufacturer.
- Please do not expose the product to splashing or water contact

- The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the product. Dry location use only.
- No naked flame source, such as candles, should be placed on the product.
- This appliance is not to be used by persons (including children) with reduced physical, sensor or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
Children being supervised not to play with the appliance.

GENERAL SAFETY (CONT.)

- If you notice any unusual odors or smoke around the unit, immediately disconnect the unit from the outlet and contact the service center. Failure to do so may result in fire or electric shock.
- When not using the unit for long periods of time or when you are moving the unit. Please disconnect the product from power supply.
- Please beware that Dust could accumulate over time on the unit and cause it to generate heat and or deteriorate insulation, which in turn may result in an electrical fire.
- To maintain the product do not use any chemical or cleaning agent or wet cloth, please only ensure to utilize a dry cloth to wipe it down from marks or dust and only after unplugging the product from the power supply.
- Please ensure to contact our call center for any repair or service required for the products.

Please make sure upon positioning this product, the place is:

- Not wet or damp and Well ventilated
- Away from direct sunlight or heaters.
- Away from splashes or food.
- Protected from excessive dust or grease.
- Do not place the Product near heat sources such as radiators, stoves or other audio visual equipment that produce heat.
- Do not place small metallic objects on top of the unit.
- Do not use or store flammable or combustible materials near the unit. Doing so may result in fire or explosion. Do not place any naked flame sources, such as lit candles, cigarettes or incense sticks on top of the product.

GENERAL SAFETY (CONT.)

Before first use

- Unpack the product and accessories and ensure all parts of the product are undamaged and in good working order.
- Plastic wrapping can be a suffocation hazard for babies and young children, so ensure all packaging materials are out of their reach and disposed of safely.
- Unwind the power adaptor cord to its full length and inspect it for damage before each use. Do not use the product if it or its cord has been damaged or is not working properly. In case of damage, contact our after sales support line for advice on examination, repair or return of the damaged product.
- Do not use the product in a bathroom or a similarly humid area as such an environment may reduce the lifespan of the massager mechanism.
- Ensure the product is not exposed to direct sunlight or placed near a heater or other heat source.

MAKE SURE TO COMPLETELY CHARGE THE PRODUCT BEFORE FIRST USE.

PRODUCT OVERVIEW



BASIC OPERATION

CHARGING BATTERY (230V MAINS)

CHARGE FOR AT LEAST 3 HOURS.




DO NOT STORE BATTERY INSIDE UNIT WHEN NOT IN USE.

1. Remove the battery from the compressor by pressing the locking tab (arrow down button) and pulling the battery downwards.
2. Plug the power adaptor into a mains socket then connect the charger port to the battery. The LED on the plug will illuminate RED.
3. When the LED on charger changes to green, the charging is complete. This may take up to 3 hours. Unit will run for 15 mins per charge.

CAUTION: We recommend not charging unit for more than 5 hours.

NOTE:

1. Typical run time will vary depending on battery level, pressure load during use and the operating conditions.
2. High-pressure loading, or excessive back pressure will result in a shorter run-time than indicated.
3. Cold temperature condition will reduce battery run-time. We recommend using the 12V DC adaptor/charger during cold temperature conditions.

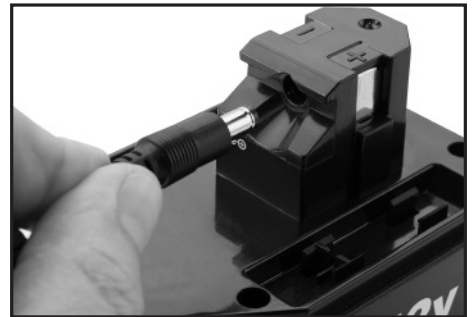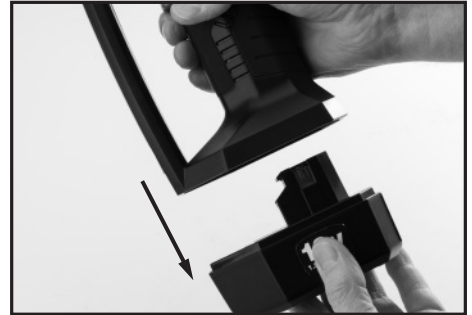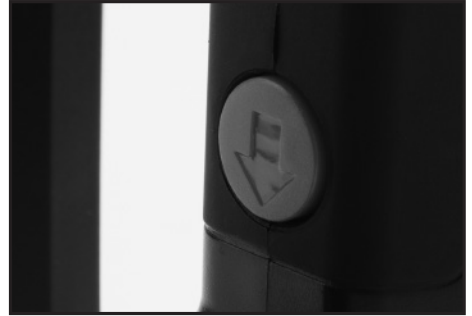

BASIC OPERATION (cont.)





DIRECT COMPRESSOR USE WITH 12V DC ADAPTOR/CHARGER

CHARGE FOR AT LEAST 3 HOURS.

DO NOT STORE BATTERY INSIDE UNIT WHEN NOT IN USE.

1. Unravel cord before use.
Note: Be sure the cord runs through the hole at the base of the pack.
2. If the battery is installed, remove from the compressor as shown.
3. Slide the 12V Adaptor/Charger pack into the compressor unit until it locks into place.
4. Connect the adaptor into the cigarette/car charger in with in your car, when ready to use power the car on.


Make sure always used in outdoor situations.

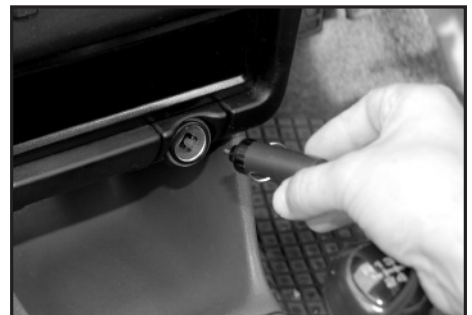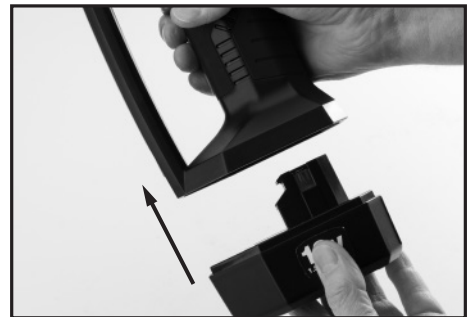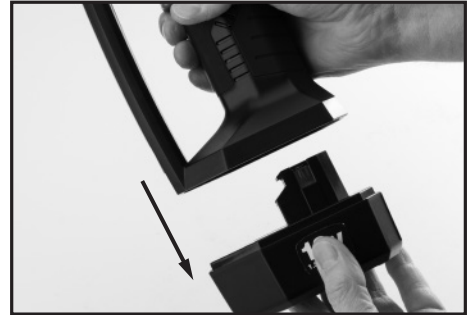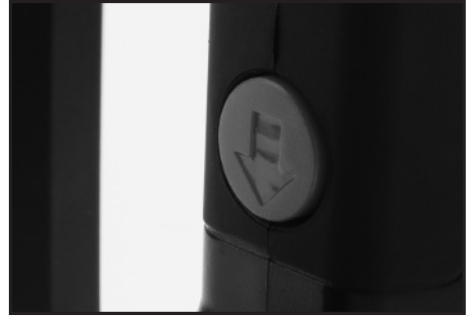

BASIC OPERATION (cont.)

USING THE LAMP

- Switch on LAMP by pressing the POWER (1) button on the FLASHLIGHT of the AIR COMPRESSOR.
- Press POWER (1) button again to turn on RED FLASHLIGHT.
- Press POWER (1) button again to turn off.

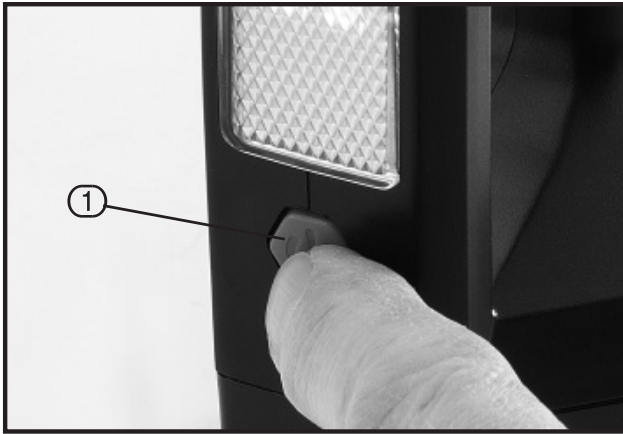

CONNECTING THE INFLATOR


- Insert one of the additional nozzles into the threaded end of the air hose and screw in tightly.



BASIC OPERATION (Cont.)

INFLATING TIRES

1. Line up the arrows on the **AIR HOSE** and the **ATTACHMENT LOCK** on the air compressor.
2. Push the **AIR HOSE** in and turn clockwise until it locks into place shown by the **LOCK** symbol below.

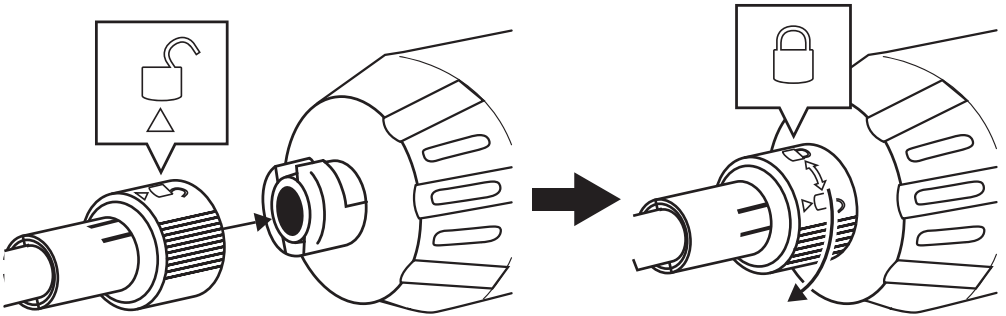

3. Press the **POWER** button below the display to turn on the Digital Tyre Gauge.
The Display Gauge will turn off after 30 seconds.



CONTINUES TO NEXT PAGE -->

BASIC OPERATION (Cont.)

4. To choose desired pressure format (PSI, BAR, KPA), Press the POWER button continuously until desired format is displayed.
5. Screw the threaded connector onto TYRE valve stem you want to pump. When connected the gauge will display the current tyre pressure.
6. Press the + or - button to set the desired tyre pressure level. Once set, wait a few seconds until the existing tyre air pressure is displayed.

NOTE: Always check and follow the manufacturers recommended pressure, usually located on the inside of the vehicles door.

7. Make sure the TRIGGER LOCK, is unlocked so when you press the TRIGGER button, the air compressor will begin to pump air.

BASIC OPERATION (Cont.)

8. The compressor will begin to inflate the tures to the set pressure level, and will shut off automatically when reached.
9. When done, remove the thread connector from the tyre quickly, and replace valve stem cap on tyre (if required).

NOTE: Tyre pressure should be checked with a tyre pressure gauge to BS EN 12645:2014.

WARNING:

Connector may be hot. Use caution when removing.

- Do not over-inflate tyres, please check the recommended tyre pressure in the vehicles owner manual.
For Bicycle tyres, check markings on tyre.
- The Display must be on before operating compressor inflator
Use a separate pressure gauge for more accurate rating.

INFORMATION

Maintenance

- Easy to clean. Store it in its original box or within storage container to keep dust accumulation to a minimum.
- Never use cleaners chemicals, hard brushes.

CAUTION!

- Do not allow water or any other liquids to come into contact with the unit.
- Do not clean with any liquids.

Troubleshooting

If your product stops working, make sure the product is fully charged. If unit is still not working, contact our call centre at info@ayonz.com.

Do not attempt to open and repair the unit yourself.

SPECIFICATIONS

INPUT	12VDC 7A
UNITS	PSI / BAR / KPa
CHARGE TIME	Up to 3 hours
Max Pressure	125 PSI
USE TIME	15 Minutes (depending on conditions)
Hose Length	150mm
Weights	Net: 1.1 kg / Gross: 1.4 kg

Max. working pressure 8.6 bar (125 PSI), 3 min on/15min off or
Max. working pressure 4.1 bar (60 PSI), 15 min on/15mins off.

Use only with battery and power pack included INR18650-1.

URBANWORX

CUSTOMER HELPLINE:

info@ayonz.com

DISTRIBUTED BY:

Ayonz Pty Ltd